

EBF  
EBM



F // SERIE




**(EBF) ELEVADOR DE BALDES**

BOWL LIFTING DEVICE / ELEVADOR DE PEROLES / BASCULEUR DE CUVE

**(EBM) ELEVADOR DE BALDES MANUAL**

MANUAL BOWL LIFTING DEVICE / ELEVADOR DE PEROLES MANUAL

ELÉVATEUR DE CUVE MANUEL

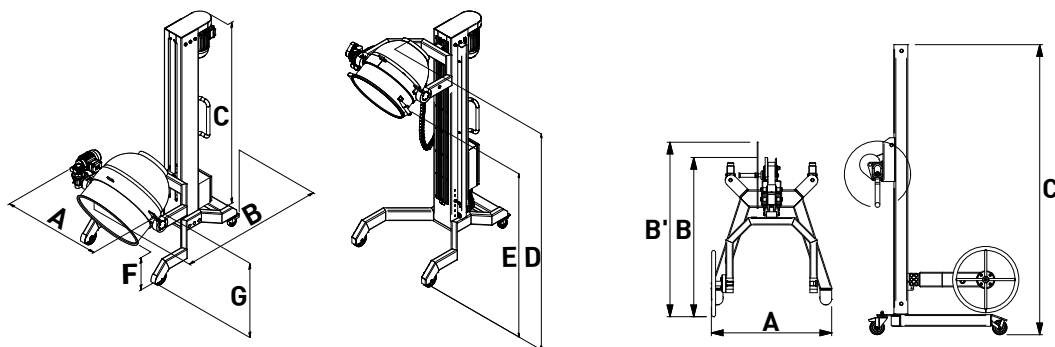

CC\_006-13

	EBF040	EBF080	EBF120	EBM040	
POTÊNCIA (kW)-(hp) Power / Potencia / Puissance	1,68 [2,2]	1,68 [2,2]	1,68 [2,2]	-	
CE 400-230V.3ph.50-60Hz					
Outras voltagens e certificações: sob consulta / Other voltages and certifications: under request / Otros voltajes y certificaciones: bajo consulta / Autres voltages et certifications: sur demande					
PESO LÍQUIDO (kg)-(lb) Net weight / Peso neto / Poids net	200 [440,92]	200 [440,92]	200 [440,92]	93 [205,03]	
CAP. MÁX. ELEVAÇÃO COM BALDE (kg)-(lb) Max. bowl lifting capacity / Cap. máx. elevación con perol / Cap. max. de élévation de la cuve	140 [308,64]	140 [308,64]	140 [308,64]	140 [308,64]	
	A	846 [33 5/16]	1015 [39 15/16]	1015 [39 15/16]	825 [32 1/2]
	B	1151 [45 5/16]	1325 [52 3/16]	1485 [58 7/16]	1090 [42 15/16]
	C	2020 [79 1/2]	2020 [79 1/2]	2020 [79 1/2]	1990 [78 3/8]
DIMENSÕES (mm)-(in) Dimensions / Dimensiones / Dimensions	D	2167* [84 5/16]*	2155* [84 13/16]*	2190* [86 1/4]*	-
	E	1595* [62 13/16]*	1550* [61]*	1510* [59 7/16]*	-
	F	255* [10 1/16]	210* [8 1/4]	170* [6 11/16]	-
	G	570 [22 7/16]	570 [22 7/16]	570 [22 7/16]	-

\* Balde virado a 120° / Bowl turned at 120° / Perol girado a 120° / Cuve tournée a 120°

#### CARACTERÍSTICAS GERAIS

Main features / Características generales  
Caractéristiques générales

INOX - ESTRUTURA EM AÇO INOXIDÁVEL AISI 304

Inox - stainless steel AISI 304 frame / Inox - estructura en acero inoxidable AISI 304 / Inox - bâti en acier inoxydable AISI 304

#### OPÇÕES

Options / Opciones / Options

(EBF) AL - SISTEMA DE VIRAGEM NA LATERAL

Side tilting / Aplicación para vuelco lateral / Inclinaison latérale

VR1 - VEIOS DE ROTAÇÃO PARA BALDE DE 40 OU 60L (PARA TRABALHAR COM EBF040i-EBM040i)

Bowl rotation shafts for 40 or 60l bowls (to work with EBF040i-EBM040i) / Eje de rotación para perol de 40 o 60l (para trabajar en el EBF040i-EBM040i) / Arbres de rotation pour cuve de 40 ou 60l (pour travailler sur EBF040i-EBM040i)